


REVISION INFORMATION			
REV.	DESCRIPTION	DATE	NAME
A	ADDED NOTE 2 AS BUILT SAMPLE	06/26/2013	V. TRAN

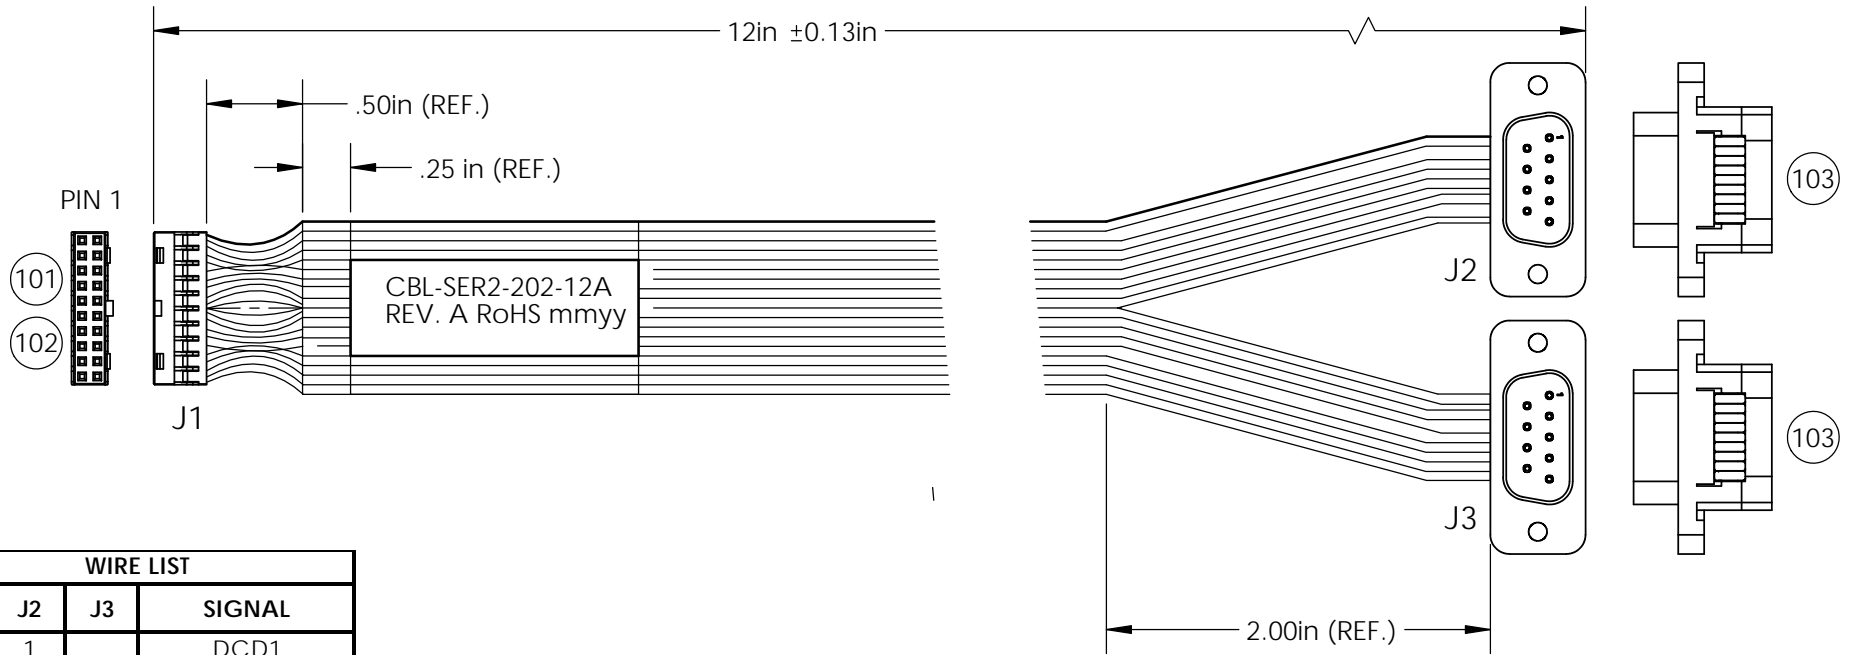

WIRE LIST			
J1	J2	J3	SIGNAL
1	1		DCD1
2	6		DSR1
3	2		RXD1
4	7		RTS1
5	3		TXD1
6	8		CTS1
7	4		DTR1
8	9		RI1
9	5		GND
10			
11		1	DCD1
12		6	DSR1
13		2	RXD1
14		7	RTS1
15		3	TXD1
16		8	CTS1
17		4	DTR1
18		9	RI1
19		5	GND
20			

NOTE:

1. ASSEMBLY MUST COMPLY WITH SPECIFICATIONS OF MANUFACTURE AND ACCEPTANCE (RoHS M&A) OF RoHS COMPLIANCE CABLE AND CABLE ASSEMBLY FOR WINSYSTEMS INC.
2. CONDUCTOR #10 AND #20TH WIRES TO BE CUT OFF AT J2 AND J3

DET.	REF.	DESCRIPTION	MANUFACTURER	MFG. P/N	QTY.
101	J1	HOUSING, 2.00mm PITCH MILLI-GRID	MOLEX	051110-2051	1
102	J1	TERMINAL, MILLI-GRID	MOLEX	050394-8051 or 050394-8100	20
103	J2, J3	DSUB MALE 9-PIN W/ STRAIN RELIEF #4-40 INSERTS	ITW-PANCON	IDM9PT5 WITH DA009	2
W1		RIBBON CABLE, 20-CONDUCTOR, 28 AWG	ITW-PANCON	050F28V10CR	12"

DRAWN: Vincent Tran	CHECKED: B. Alexander
DATE: 05/10/2013	APPROVAL: NAME



715 STADIUM DRIVE.  
ARLINGTON, TX. 76011

TITLE: CABLE, SERIAL / CAN BUS,  
2.00mm PITCH 2x10 TO 2x DSUB 9-PIN MALE

SCALE: 1:1  
SHEET 1 OF 1