

Features

Analog Inputs

- 16-bit Analog-to-Digital converter (ADC) with sample-and-hold circuit
- Input ranges: 0-5V, 0-10V, $\pm 5V$, and $\pm 10V$
- Any combination up to 16 single-ended or eight differential input channels
- Each channel independently software programmable for input type and range
- $\pm 25V$ input protection on each channel
- No missing codes over full range
- Low-noise DC/DC reference for accuracy
- Programmable interrupt

Analog Outputs


- Eight, 12-bit Digital-to-Analog converters (DAC)
- Output ranges: 0-5V, 0-10V, $\pm 2.5V$, $\pm 5V$, $\pm 10V$, and -2.5V to 7.5V
- Channels are independently software programmable
- Output channels can be updated and cleared individually or simultaneously

Digital Inputs/Outputs


- 48 Bidirectional lines with Input, Output, or Output with Readback, 24 capable of event-sense interrupt generation
- 12mA sink current per line

General

- No calibration required
- Standard 0.100" headers for easy cable access
- Operating temperature: $-40^{\circ}C$ to $+85^{\circ}C$
- +5VDC operation
- 3.6 x 3.8 Inches (90 x 96mm)
- Custom OEM configurations available
- Compatible with industry-standard I/O racks

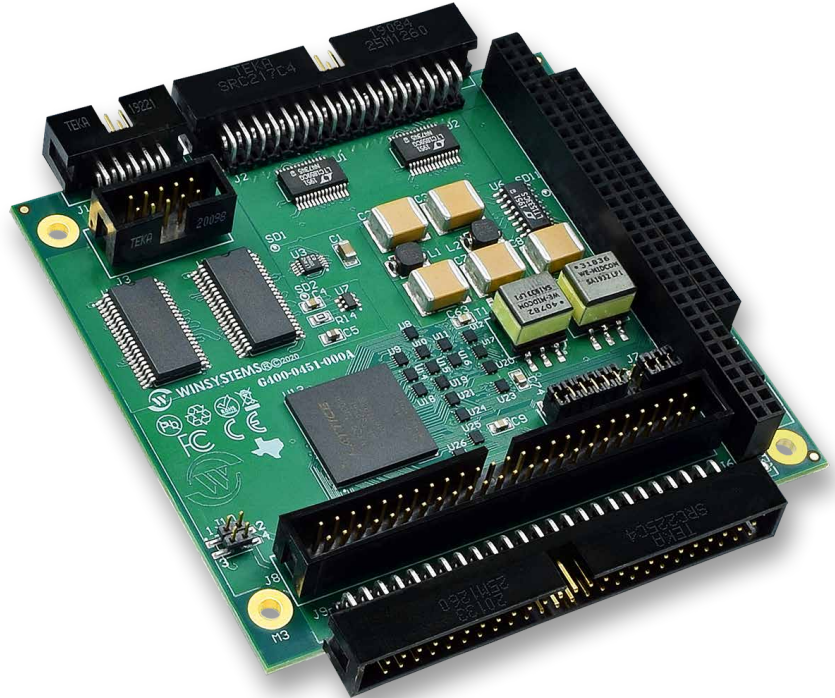

Block Diagram

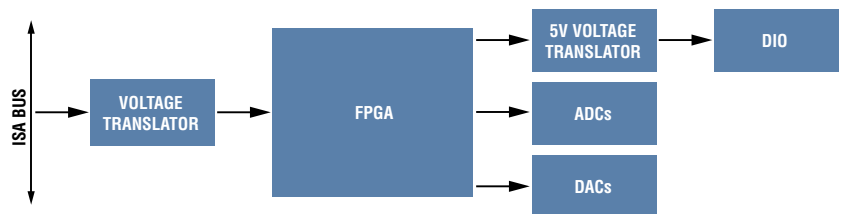

Product Description

The PCM-MIO-A-1 is a versatile, PC/104-based analog input, analog output, and digital I/O board designed for high-accuracy and high-channel count analog and digital I/O. The board is based upon Linear Technology's precision converters and voltage references which require no external calibration. The digital I/O utilizes WINSYSTEMS' versatile WS16C48 Universal I/O controller functionality, also available on many of our SBCs and other I/O products.

Analog Input Section – Two analog-to-digital converters (ADCs) are used on the board. Each contains an 8-channel multiplexer with $\pm 25V$ protection. The multiplexer on each ADC can be programmed for single-ended inputs or pairs of differential inputs or combinations of both. The precision trimmed attenuators ensure accurate input ranges. All channels are fault protected so that a problem on one channel will not affect the conversion result of another channel.

The PCM-MIO-A-1 supports four input voltage ranges. Any input range is independently software selectable for each channel.

Product Description (continued)

The board will support up to 16 single-ended input channels, eight differential input channels or various combinations of both. This means that under software control, any channel can be set for either single-ended or differential along with its voltage range.

Analog Output Section – The PCM-MIO uses two Linear Technology SoftSpan™ quad Digital-to-Analog converters (DACs). They are software programmable for either unipolar or bipolar mode plus specific voltage range on a per channel basis.

There are eight independent, 12-bit, D/A channels, each with six programmable output voltage ranges. They are asynchronously cleared to 0V for all ranges when reset.

Digital Input/Output Section – The PCM-MIO-A-1 implements WINSYSTEMS' highly-versatile WS16C48, 48-line digital I/O controller in a field programmable gate array using ASIC compatible programmed logic. There are 48 bits of bidirectional digital I/O. Each I/O line is individually programmable for input, output, or output with readback operation. Each output channel is latched and has an open collector driver (with a pull-up resistor) capable of sinking 12mA of current. This allows direct control of up to 48 opto-isolated signal conditioning modules.

The major feature of the WS16C48 controller functionality is its ability to monitor the 24 lines of Port 0, 1, and 2 for either rising or falling digital edge transitions, latch them and then interrupt the host processor notifying it that a change-of-input status has occurred. Transition polarity is programmable and enabled on a bit-by-bit basis. Each line's transition is latched.

The pinout is compatible with the industry-standard I/O module mounting racks and WINSYSTEMS' termination cards.

PC/104 Interface – The PCM-MIO is I/O mapped, requiring 32 sequential port addresses. The addresses are jumper selectable on any even 32-port boundary. The control, data, and power signals are wired to a 16-bit stackthrough PC/104 connector.

Custom OEM Configurations – WINSYSTEMS can populate this board to meet special OEM applications. Please contact an Applications Engineer with your requirements.

Technical Specifications

PART NUMBER	PCM-MIO-A-1	PCM-MIO-A-AD-1
ELECTRICAL	<ul style="list-style-type: none">PC/104 Bus: 16-bit, stackthroughVoltage: +5V ±5% @ 500mA (typ.) All outputs unloaded	<ul style="list-style-type: none">PC/104 Bus: 16-bit, stackthroughVoltage: +5V ±5% @ 500mA (typ.) All outputs unloaded
A/D SECTION	<ul style="list-style-type: none">Input: Up to 16 single-ended or 8 differentialRange: 0-5V, 0-10V, ±5V, and ±10VResolution: 16-bitsInput Impedance:<ul style="list-style-type: none">42kohm (typ.) unipolar mode31kohm (typ.) bipolar mode	<ul style="list-style-type: none">Input: Up to 16 single-ended or 8 differentialRange: 0-5V, 0-10V, ±5V, and ±10VResolution: 16-bitsInput Impedance:<ul style="list-style-type: none">42kohm (typ.) unipolar mode31kohm (typ.) bipolar mode
D/A SECTION	<ul style="list-style-type: none">Output: Eight channelsRange: 0-5V, 0-10V, ±2.5V, ±5V, ±10V, and -2.5V to 7.5VResolution: 12-bits, no missing codesSettling Time: 2µS to 0.1% full scale stepOutput Current: ±10mA per output typical with ±30mA max per board	N/A
DIGITAL I/O	<ul style="list-style-type: none">Type: 48-bits organized in six, 8-byte segmentsLogic: TTL-compatible with 12mA sink for each pin	<ul style="list-style-type: none">Type: 48-bits organized in six, 8-byte segmentsLogic: TTL-compatible with 12mA sink for each pin
ENVIRONMENTAL	<ul style="list-style-type: none">Operational from -40°C to +85°CRoHS compliant	<ul style="list-style-type: none">Operational from -40°C to +85°CRoHS compliant
MECHANICAL	<ul style="list-style-type: none">Dimensions: 3.6 x 3.8 inches (90 x 96mm)Weight: 3.20 oz. (90.72 g)	<ul style="list-style-type: none">Dimensions: 3.6 x 3.8 inches (90 x 96mm)Weight: 3.20 oz. (90.72 g)

Order Information

PART NUMBER	PCM-MIO-A-1	PCM-MIO-A-AD-1 <i>Minimum Order Quantity Required.</i>
-------------	-------------	---

Contact an Application Engineer or visit our website for more information.



WINSYSTEMS reserves the right to make changes to products and/or documentation without further notification. Product names of other companies may be trademarks of their respective companies.