

Features

- NXP® i.MX 6DL Industrial Processor @ 800MHz Dual Arm Cortex™-A9 CPU
- 2GB of Soldered DDR3 RAM
- High-Performance Video and Graphics
 - HD1080p, 3D, and 2D HW Accelerators
- Multiple Video Interfaces
 - HDMI 1.4 and Two Channel LVDS
- Gigabit Ethernet with IEEE-1588™
- Six USB 2.0 Ports and One Micro USB Port
- Two CAN Ports
- One RS-232/422/485 Serial Port up to 1Mbps
- 24 Lines GPIO tolerant up to 30VDC
- HDMI and Stereo Audio
- SD and MicroSD Sockets
- Mini-PCIe and IO60 Expansion
- Powered by PoE or 10-50VDC Input
- Fanless -40° to +85°C Operation
- Runs Linux and Android™




Product Description

WINSYSTEMS' SBC35-C398DL dual core single board computer combines high performance multimedia graphics with a rich mix of industrial I/O. The NXP i.MX 6DL processor's integrated power management provides excellent efficiency and allows operation from -40° to +85°C without active cooling. It is designed for demanding applications in security, transportation, medical, and digital signage.

The low power, high-performance of Arm cores coupled with readily available software tools make them an excellent choice for embedded systems. Leveraging NXP's proven track record in long term product support with the operating system and application development driven by consumer Arm devices, the SBC35-C398 is ideal for off-the-shelf industrial designs.

The SBC35-C398 series also includes the IO60 expansion connector to allow for additional functionality. The IO60 specification supports I2C, SPI, TTL-UART, and PWM signals allowing stackable expansion through off-the-shelf or application specific designed modules. When coupled with the Mini-PCIe socket, the SBC35-C398 is one of the most expandable ARM designs currently on the market.

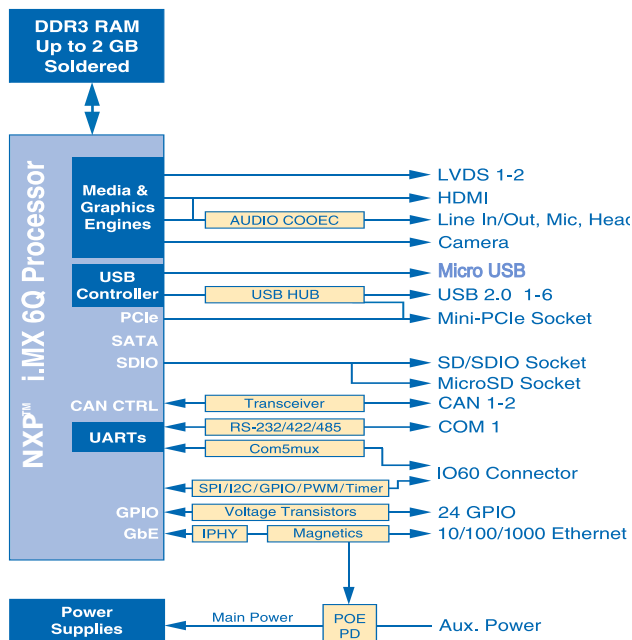

SBC35-C398DL-2-0 Block Diagram

SBC35-C398DL: Dual Core Arm® 3.5 Inch SBC

Technical Specifications				
Product Number		SBC35-C398Q-2-0	SBC35-C398DL-2-0	SBC35-C398S-1-0
Processor		NXP i.MX 6Q	NXP i.MX 6DL	NXP i.MX 6S
	Cores	4x Arm Cortex A9	2x Arm Cortex A9	Arm Cortex A9 800MHz
	Frequency	800MHz	800MHz	32KB/32KB L1, 512KB L2
	Cache	32KB/32KB L1, 1MB L2	32KB/32KB L1, 512KB L2	
Memory		2GB 64bit DDR3	2GB 64bit DDR3	1GB 32bit DDR3
	Embedded SRAM	256KB	128KB	128KB
Hardware Display Accelerators		NEON Media Processor Engine	NEON Media Processor Engine	NEON Media Processor Engine
	3D Graphics Core	Open GL ES 3.0, Open CL	Open GL ES 3.0	Open GL ES 3.0
	2D Graphics Core	Dual BitBlit	BitBlit	BitBlit
	Vector Graphics Core	OpenVG 1.1	-	-
Video Interfaces		Up to Four Active Displays	Up to Two Active Displays	Up to Two Active Displays
	HDMI 1.4 Type A	HD1080p60	HD1080p30	HD1080p30
	LVDS Interface	2x (2048x1536) or 2x (1280x720)	2x (1366x768)	2x (1366x768)
	MIPI/DSI	Capture + Display	-	-
MIPI		Display Port + Camera Input	-	-
Camera Interface		CMOS 8 bit	CMOS 8 bit	-
Ethernet		1Gbps	1Gbps	1Gbps
		Wake on LAN (WOL)	Wake on LAN (WOL)	Wake on LAN (WOL)
		IEEE-1588	IEEE-1588	IEEE-1588
Serial	RS-232/422/485	2x up to 1Mbps	1x up to 1Mbps	1x up to 1Mbps
	RS-422/485	3x up to 5Mbps	-	-
CAN Ports		Two	Two	-
USB Ports with Over-Current Protection		6x USB 2.0 + Micro USB	6x USB 2.0 + Micro USB	2x USB 2.0 + Micro USB
Audio Interfaces		HDMI + Line In/Out, Mic, Head	HDMI + Line In/Out, Mic, Head	HDMI
General Purpose I/O		24 Lines Tolerant to 30V	24 Lines Tolerant to 30V	24 Lines Tolerant to 30V
Mass Storage		CFast + SD/SDIO + MicroSD	SD/SDIO + MicroSD	SD/SDIO + MicroSD
Expansion Bus Connectors				
	Mini-PCIe	One Half-size	One Half-size	-
	IO60	I2C, SPI, TTL & PWM	I2C, SPI, TTL & PWM	I2C, SPI, TTL & PWM
Operating Temperature		-40° to +85°C	-40° to +85°C	-40° to +85°C
Timers		Three	Three	Three
Real Time Clock		Secure RTC	Secure RTC	Secure RTC
Battery		Optional External	Optional External	Optional External
Watchdog Timer		Programmable + TrustZone	Programmable + TrustZone	Programmable + TrustZone
Electrical	PoE PD	IEEE802.3at (Up to 25W)	IEEE802.3at (Up to 25W)	IEEE802.3at (Up to 25W)
	Aux. Input	10 - 50VDC	10 - 50VDC	10 - 50VDC
Mechanical				
	Dimensions	4 x 5.75 in (102 x 146 mm)	4 x 5.75 in (102 x 146 mm)	4 x 5.75 in (102 x 146 mm)
	Weight	5.0 oz (142.2 gm)	4.8 oz (136.1 gm)	4.2 oz (113.4 gm)
	PC Board Thickness	0.078"	0.078"	0.078"
Product Number		SBC35-C398Q-2-0	SBC35-C398DL-2-0	SBC35-C398S-1-0

Ordering Information

Visit our website, www.WinSystems.com, or contact us by email, sales@WinSystems.com, or call 1-817-274-7553 for complete ordering information.

© WINSYSTEMS, Inc. Product names of other companies may be trademarks of their respective companies. WINSYSTEMS reserves the right to make changes to products and/or documentation without further notification.